



## **TENNECO**

C-6010

3 - 12 kΩ

M18x1.5

22.2mm / 7/8"

20.6 mm / 13/16"

Iridium/Iridium

nom. 0.25

40-50Nm

# C-6010



#### SAE MONOBLOCK TERMINAL AND NON-RIBBED INSULATOR

for enhanced connection to ignition leads

### **Dimensions**

**Basic Technical Data** 

**Properties** 

Thread


Thread length

Precious metals

Tightening Torque (Cast iron)

Electrode gap

Suppressor Resistor

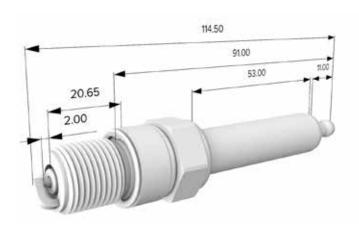

## Electrode Gap, Nom.

0,2mm 0,25mm 0,3mm

#### **Electrode Resistance**

2 kΩ 3 - 12 kΩ 16 kΩ

Federal-Mogul Ignition GmbH Bürgermeister-Schmidt-Str. 17 51399 Burscheid, Germany https://ignition.tenneco.com

© 2022 Tenneco Inc. All rights reserved. All trademarks are owned by Tenneco Inc. or one of its subsidiaries, in one or more countries. C-6010

# **Target Applications**

• Stationary Biogas or Natural Gas Engines

## **Engines**

• Caterpillar, Cummins, Waukesha

#### **Cross References**

• Denso GI3-1 , Denso GI3-5, NGK AS2-25, Bosch 7305